










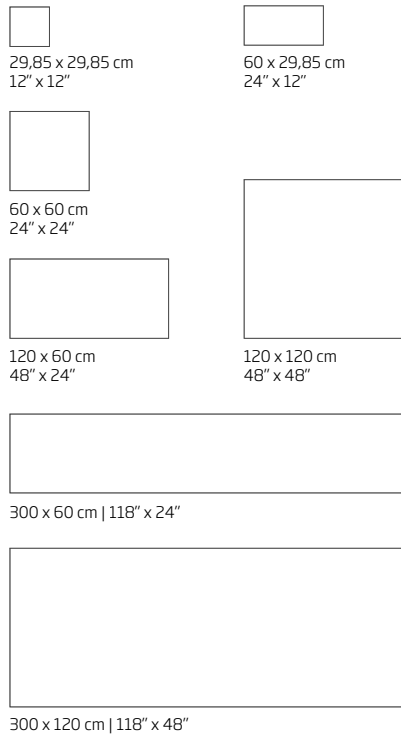








Dimensions | Technical Characteristics



Special sizes upon request
 Misure speciali su richiesta
 Mesures spéciales sur demande
 Spezialabmessungen auf Anfrage
 Medidas especiales sobre demanda
 Специальные размеры по заказу

Thickness | Spessore
 Epaisseur | Stärke
 Espesor | Толщина
6.6 Mm | 1/4"

Weight | Peso
 Poids | Gewicht
 Peso | Вес
14 kg/m² | 2.87 lbs/sqf

-  ASTM C 373 | UNI EN ISO 10545 (3)
WATER ABSORPTION
NONE
-  ASTM C 484 | UNI EN ISO 10545 (9)
THERMAL SHOCKS RESISTANCE
RESISTANT
-  ASTM D 256
IMPACT RESISTANCE
6.1 J/m
-  ASTM C 648
BREAKING STRENGTH
40.9 MPa
-  ASTM D 790M
FLEXURAL STRENGTH
28.1 MPa
-  ASTM C 1243 | UNI EN ISO 10545 (6)
ABRASIVE WEAR
87.1 mm³
-  ASTM C 1028 (Wet/Dry)
FRICTION COEFFICIENT
0.63/0.91
-  ASTM D 648
HIGH TEMPERATURE RESISTANCE
94°C
-  ASTM D 1712
STAIN RESISTANCE
NO STAINING
-  DIN 51094
LIGHT EXPOSURE
RESISTANT
-  UNI 8457
RESISTANCE TO FIRE
CLASS 1
-  DIN 51130
RESISTANCE TO SKIDDING
R9
-  RECYCLED CONTENT
UP TO 72%
-  UNI EN ISO 10545 (8)
LINEAR THERMAL EXPANSION
23.8 x 10⁻⁶ °C⁻¹
-  UNI EN ISO 10545 (9)
RESISTANCE TO THERMAL SHOCKS
RESISTANT
-  UNI EN ISO 10545 (12)
FROST RESISTANCE
RESISTANT
-  DIN 51961
RESISTANCE TO CIGARETTE BURNS
RESISTANT

